



Lenovo 4XB7A38182 unidad de estado sólido 480 GB Serial ATA III 3D TLC NAND


Marca : Lenovo

Código del producto: 4XB7A38182

Nombre del producto : 4XB7A38182

Lenovo 4XB7A38182. SDD, capacidad: 480 GB, Velocidad de lectura: 540 MB/s, Velocidad de escritura: 410 MB/s, Velocidad de transferencia de datos: 6 Gbit/s, Componente para: Servidor/estación de trabajo

| Características                     |                              | Características                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------------------------------------|------------------------------|---------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Algoritmos de seguridad soportados  | 256-bit AES                  | Certificación                                     | Micron Green Standard Built with sulfur resistant resistors CE (Europe): EN 55032 Class B, RoHS FCC: CFR Title 47, Part 15 Class B UL: UL-60950-1, 2nd Edition BSMI (Taiwan): approval to CNS 13438 RCM (Australia, New Zealand): AS/NZS CISPR32 Class B KCC RRL (Korea): approval to KN 32 Class B, KN 35 Class B W.E.E.E.: Compliance with EU WEEE directive 2002/96/EC. TUV (Germany): approval to IEC60950/EN60950 VCCI (Japan): 2015-04 Class B IC (Canada): CISPR32 Class B: Canadian ICES-003:2016 |
| SDD, capacidad *                    | 480 GB                       |                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Interfaz *                          | Serial ATA III               |                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Tipo de memoria *                   | 3D TLC NAND                  |                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Componente para *                   | Servidor/estación de trabajo |                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Encriptación de hardware *          | ✓                            |                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Velocidad de transferencia de datos | 6 Gbit/s                     |                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Velocidad de lectura                | 540 MB/s                     |                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Velocidad de escritura              | 410 MB/s                     |                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Lectura aleatoria (4KB)             | 85000 IOPS                   |                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Escritura aleatoria (4KB)           | 36000 IOPS                   |                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Latencia de lectura                 | 175 μs                       | Control de energía                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Latencia de escritura               | 100 μs                       | Consumo de energía (lectura)                      | 2,5 W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Soporte S.M.A.R.T.                  | ✓                            | Consumo de energía (escritura)                    | 3,1 W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Hot-swap                            | ✓                            | Peso y dimensiones                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Tiempo medio entre fallos           | 3000000 h                    | Ancho                                             | 70 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|                                     |                              | Profundidad                                       | 100 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|                                     |                              | Altura                                            | 7 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                                     |                              | Peso                                              | 70 g                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                                     |                              | Condiciones ambientales                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|                                     |                              | Intervalo de temperatura operativa                | 0 - 70 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|                                     |                              | Intervalo de temperatura de almacenaje            | -40 - 85 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                                     |                              | Intervalo de humedad relativa para funcionamiento | 5 - 95%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|                                     |                              | Vibración no operativa                            | 3,13 G                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|                                     |                              | Golpes en funcionamiento                          | 1500 G                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|                                     |                              | Datos logísticos                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|                                     |                              | Código de Sistema de Armomización (SA)            | 84717070                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

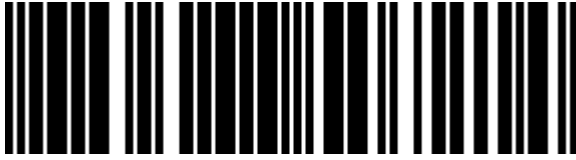

0889488507214



889488507214

### Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.