


DIGITUS Cat.6A U/UTP installation cable, 305 m, simplex, Eca

DK-1613-A-VH-305
EAN 4016032344100

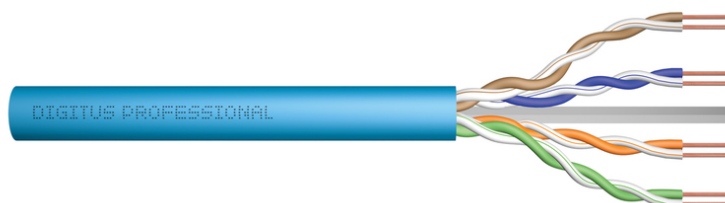

CAT 6A U-UTP installation cable, 500 MHz Eca (EN 50575), AWG 23/1, 305 m drum, sx, blue

The Digitus® Cat.6A U/UTP installation cable is characterized by the following cable construction 4x2x AWG23/1 and reaches a transmission frequency up to 500 MHz. The halogen free cable jacket is conform to the standard IEC 60332-1, FRNC-B, LSZH-1 and CPR Euro class Eca. The cable is suitable for building structured cabling in the secondary and tertiary area. Compliant with the following standards ISO/IEC 11801, DIN EN 50173, DIN EN 50288-11-1.

Future-oriented standards and high-end quality for your network.







- Physical properties:
- Conductor: Bare annealed copper, olid AWG 23/1
- System/s of AVCP: AVCP 3
- Insulation: HD-PE (High Density Polyethylene)
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Individual pair shield: None
- Overall shielding: None
- Outer sheath: Eca to B2ca acc. to EN 50575; LSZH
- Outer sheath diameter (nominal): 0,5 mm (Eca); 0,6 mm (Dca); 1,2 mm (Cca); 1,4 mm (B2ca)
- Outer sheath color: Light blue (RAL 5012)
- Mechanical properties:
- Tensile loading: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.

- Shipping- and storage temperature range: -20 °C up to +60 °C
- Operating temperature range: -20 °C up to +75 °C
- Installation temperature range: 0 °C up to +50 °C
- Overall diameter Simplex (nominal): 7,1 mm (Eca); 7,3 mm (Dca); 7,4 mm (Cca); 7,6 mm (B2ca)
- Weight (kg/km): 53 kg (Eca); 54 kg (Dca); 55 kg (Cca); 56 kg (B2ca)
- Electrical properties:
- Impedance: 100±50hm @ 1 - 600MHz
- Capacitance: 40 pF/m nominal @ 1 KHz
- Capacitance unbalance (pair-ground): 1.6 pF/m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC loop resistance: 147 Ohm/km max. (2% max. resistance unbalance)
- Voltage resistance: 72 Vdc max.
- Coupling attenuation: CA-Type 2
- Signal propagation delay: 450 nS/100 m max.
- Propagation delay: 10 nS/100 m max.
- Separating class: "c" acc. to EN 50174-2
- NVP: 70%
- Assortment: Twisted Pair Installation Cables
- Length: 305 m
- Length: 305 m
- Category: CAT 6A
- Color: light-blue
- CPR: Eca
- Jacket: LSOH
- Shielding: U-UTP, unshielded
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	17.00	39.00	39.00	27.00	41,067.00
Packaging Unit Inside	1	17.00	39.00	39.00	27.00	41,067.00
Packaging Unit Single	1	17.00	39.00	39.00	27.00	41,067.00
Net single without Packaging	1	16.82	39.00	39.00	27.00	41,067.00

More images:

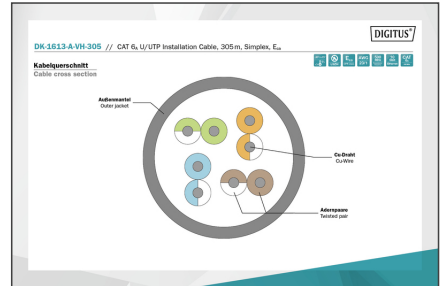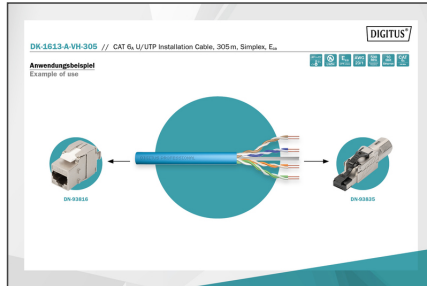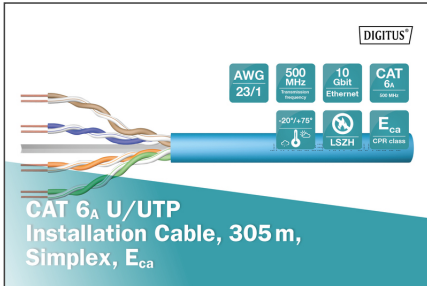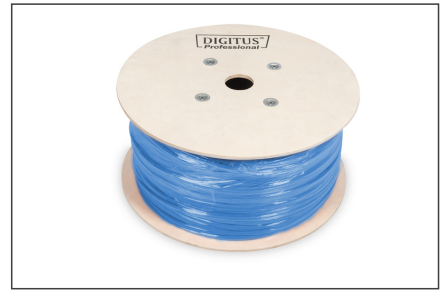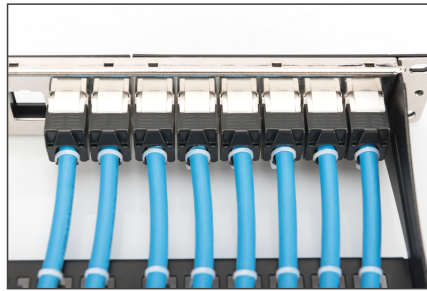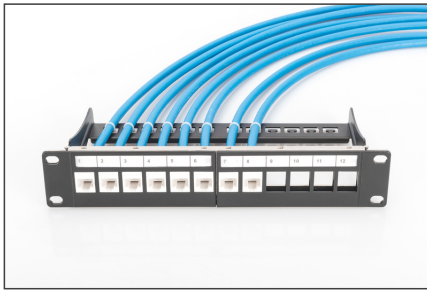

Produktdaten Product Information		Physikalische Spezifikationen Physical Properties	
Produktname Product Name	DK.1613-A-VH-305	Material Material	100% Recycled PVC
Produkttyp Product Type	Installation Cable	Material Color	Blue
Produktlänge Product Length	305 m	Material Weight	1.2 kg
Produktbreite Product Width	12 mm	Material Thickness	1.2 mm
Produktfarbe Product Color	Blue	Material Temperature	20°/175°
Produktmaterial Product Material	PVC	Material Density	1.38 g/cm³
Produktgewicht Product Weight	1.2 kg	Material Resistance	100 MΩ
Produktanwendung Product Application	Installation Cable	Material Certification	RoHS, REACH
Produktbeschreibung Product Description	This is a high-quality, professional-grade installation cable. It is designed for use in a variety of applications, including data centers, offices, and homes. The cable is made of 100% recycled PVC and is blue in color. It has a length of 305 m and a width of 12 mm. The cable is made of 100% recycled PVC and is blue in color. It has a length of 305 m and a width of 12 mm.		

Leistungseigenschaften Performance Properties		Mechanische Eigenschaften Mechanical Properties	
Leistungseigenschaft 1	100%	Mechanische Eigenschaft 1	100%
Leistungseigenschaft 2	100%	Mechanische Eigenschaft 2	100%
Leistungseigenschaft 3	100%	Mechanische Eigenschaft 3	100%
Leistungseigenschaft 4	100%	Mechanische Eigenschaft 4	100%
Leistungseigenschaft 5	100%	Mechanische Eigenschaft 5	100%
Leistungseigenschaft 6	100%	Mechanische Eigenschaft 6	100%
Leistungseigenschaft 7	100%	Mechanische Eigenschaft 7	100%
Leistungseigenschaft 8	100%	Mechanische Eigenschaft 8	100%
Leistungseigenschaft 9	100%	Mechanische Eigenschaft 9	100%
Leistungseigenschaft 10	100%	Mechanische Eigenschaft 10	100%

