

StarTech.com Tarjeta Adaptadora PCI Express de 2 Puertos Serie y 1 Paralelo RS232 UART 16550 Serial


Marca : StarTech.com

Código del producto: PEX2S5531P

Nombre del producto : Tarjeta Adaptadora PCI Express de 2 Puertos Serie y 1 Paralelo RS232 UART 16550 Serial



StarTech.com Tarjeta Adaptadora PCI Express PCIe de 2 Puertos Serie y 1 Paralelo RS232 UART 16550 Serial - 2x DB9 Macho - 1x DB25 Macho
 StarTech.com Tarjeta Adaptadora PCI Express de 2 Puertos Serie y 1 Paralelo RS232 UART 16550 Serial.
 Interfaz de host: PCIe, Interfaz de salida: De serie, Estándar de la tarjeta de expansión: PCIe 1.0a. Color del producto: Verde, Acero inoxidable. Circuito integrado: ASIX - MCS9901CV-CC, Velocidad de transmisión: 460,8 Kbit/s, PEPS (Primeras Entradas, Primeras Salidas): 128 B. Sistema operativo Windows soportado: Windows 10 Education, Windows 10 Education x64, Windows 10 Enterprise, Windows 10 Enterprise x64,...., Sistema operativo MAC soportado: Mac OS X 10.4 Tiger, Mac OS X 10.5 Leopard, Mac OS X 10.6 Snow Leopard, Mac OS X 10.7 Lion, Mac OS..., Sistema operativo de servidor soportado: Windows Server 2003, Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2, Windows.... Ancho: 120 mm, Profundidad: 105 mm, Altura: 20 mm



Puertos e Interfaces		Requisitos del sistema	
Interfaz de host *	PCIe	Sistema operativo MAC soportado	Mac OS X 10.4 Tiger, Mac OS X 10.5 Leopard, Mac OS X 10.6 Snow Leopard, Mac OS X 10.7 Lion, Mac OS X 10.8 Mountain Lion, Mac OS X 10.9 Mavericks
Interfaz de salida *	De serie		
Estándar de la tarjeta de expansión	PCIe 1.0a	Sistema operativo Linux soportado	✓
Puerto serial	2		
Tipo de serie de interfaz	RS-232	Sistema operativo de servidor soportado	Windows Server 2003, Windows Server 2008 R2, Windows Server 2012, Windows Server 2016, Windows Server 2019
Puerto paralelo	1		Windows Embedded POSReady 2009, Windows Embedded Standard 2009
Diseño		Otros sistemas operativos soportados	
Interno *	✓		
Color del producto	Verde, Acero inoxidable		
Características		Detalles técnicos	
Circuito integrado	ASIX - MCS9901CV-CC	Certificados de conformidad	CE, RoHS
Velocidad de transmisión	460,8 Kbit/s	Peso y dimensiones	
PEPS (Primeras Entradas, Primeras Salidas)	128 B	Ancho	120 mm
Tipo de control de flujo	DTR/DSR, RTS/CTS, XON/XOFF	Profundidad	105 mm
Protocolos soportados	EPP, ECP, SPP, PS/2	Altura	20 mm
Condiciones ambientales		Peso	112 g
Intervalo de temperatura operativa	-10 - 80 °C	Empaquetado	
Intervalo de temperatura de almacenaje	-20 - 100 °C	Controladores incluidos	✓
Intervalo de humedad relativa para funcionamiento	5 - 85%	Manual de usuario	✓
		Ancho del paquete	145 mm
		Profundidad del paquete	174 mm
		Altura del paquete	31 mm
		Peso del paquete	208 g


Requisitos del sistema		Datos logísticos	
Sistema operativo Windows soportado	Windows 10 Education, Windows 10 Education x64, Windows 10 Enterprise, Windows 10 Enterprise x64, Windows 10 Home, Windows 10 Home x64, Windows 10 Pro, Windows 10 Pro x64, Windows 2000, Windows 2000 Professional, Windows 7 Enterprise, Windows 7 Enterprise x64, Windows 7 Home Basic, Windows 7 Home Basic x64, Windows 7 Home Premium, Windows 7 Home Premium x64, Windows 7 Professional, Windows 7 Professional x64, Windows 7 Starter, Windows 7 Starter x64, Windows 7 Ultimate, Windows 7 Ultimate x64, Windows 8, Windows 8 Enterprise, Windows 8 Enterprise x64, Windows 8 Pro, Windows 8 Pro x64, Windows 8 x64, Windows 8.1, Windows 8.1 Enterprise, Windows 8.1 Enterprise x64, Windows 8.1 Pro, Windows 8.1 Pro x64, Windows 8.1 x64, Windows 95, Windows 98SE, Windows CE, Windows ME, Windows Vista Business, Windows Vista Business x64, Windows Vista Enterprise, Windows Vista Enterprise x64, Windows Vista Home Basic, Windows Vista Home Basic x64, Windows Vista Home Premium, Windows Vista Home Premium x64, Windows Vista Ultimate, Windows Vista Ultimate x64, Windows XP Home, Windows XP Home x64, Windows XP Professional, Windows XP Professional x64	Código de Sistema de Armomización (SA)	84733020
		Cantidad por caja	75 pieza(s)
		Ancho de la caja principal	355 mm
		Longitud de la caja	679 mm
		Alto de la caja principal	320 mm



0065030841764



065030841764

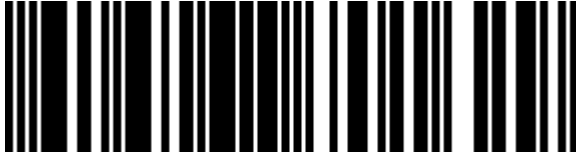

0616268701629



616268701629

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.